



4- Stroke Power Cutter Promotion

Purchase 1 EK7561H



MM4

4-STROKE ENGINE

THE 4-STROKE ADVANTAGE

- No Oil Mixing Simplifies Operation and Prevents Engine Failure Due to Improper Mix
- Eliminates the Need for Separate Mixed Oil/Fuel Can
- Lower Noise at 106.5 dB(A) and Smoother Idle for Continuous Operation
- Lower Fuel Consumption at .45 Gallons Per Hour
- Reduced Exhaust and Intake Carbon Build-Up for Longer Cylinder Life
- Three Ring Piston for Improved Commercial Engine Durability

RECEIVE THIS FREE


\$549 VALUE!



E-01719
14" Diamond Blade, Segmented, General Purpose



B-69674
14" Diamond Blade, Segmented, Dual Purpose

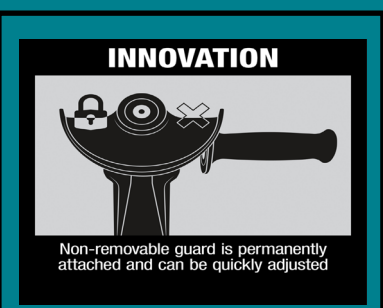

GA4553R
4-1/2" Paddle Switch Angle
Grinder, with
Non-Removable Guard

4-1/2" PADDLE SWITCH ANGLE GRINDER, WITH NON-REMOVABLE GUARD



NEW TOOL OVERVIEW GA4553R



FEATURES

- Narrow barrel grip design allows for increased hand comfort while operating
- No lock-on power switch; Features a two stage power lock-off switch to start the grinder
- Quick guard rotation allows easy tool-less adjustment for increased productivity
- Anti-restart protection is engineered to prevent motor start up in the on-power switch position after a power disruption
- Soft start suppresses start-up reaction for smooth start-ups and longer gear life
- Spiral bevel gears for smoother rotations and a more efficient transfer of energy
- Gear housing cover with labyrinth construction seals the drive gear and bearings from dust and debris for increased durability
- Zig-zag epoxy applied to the armature coils is designed to protect from harmful debris while maintaining proper heat decimation for longer life
- Rubberized side handle provides increased comfort on the job
- Large spindle lock button for easier wheel changes while wearing gloves

SPECIFICATIONS

Wheel Diameter	4-1/2"
AMPS	11
No Load Speed	11,000 RPM
Spindle Type	5/8" - 11 UNC
Lock-On Switch	No
Lock-Off Switch	Yes
Switch Type	Body grip/paddle
Overall Length	12-3/4"
Net Weight	6 lbs.
Variable speed dial	No
Bind-Up Control	No
UPC Code	088381-887878
Power Type	Corded

PRODUCT HIGHLIGHTS



INNOVATION

Non-removable guard is permanently attached and can be quickly adjusted



CONVENIENCE

Integrated tethering loop can be attached to lanyards when working at heights



POWER

Powerful 11 AMP motor delivers more output and 11,000 RPM for the most demanding applications



COMFORT

Large no lock-on paddle switch allows for power start press points at multiple grip positions

STANDARD EQUIPMENT

- Side Handle (158237-4)
- Lock Nut Wrench (782424-9)
- Inner Flange (224399-1)
- Lock Nut (224486-6)
- 4-1/2" Tool-Less Wheel Guard (140N42-7)

RELATED PRODUCTS

1. 4-1/2" Clip-On Cut-Off Wheel Guard Cover (199709-0)
2. Vibration Dampening Side Handle (162258-0)
3. 4-1/2" / 5" Paddle Switch Angle Grinder, with AC/DC Switch (GA5052)
4. 4-1/2" / 5" Paddle Switch Angle Grinder, with Non-Removable Guard (GA5053R)
5. 5" SJS™ Paddle Switch Angle Grinder (9565PC)

